


# USB/PCI/PCIe-GPIB


## High-Performance IEEE-488 GPIB Interface for USB/PCI/PCIe Express



PCIe-GPIB

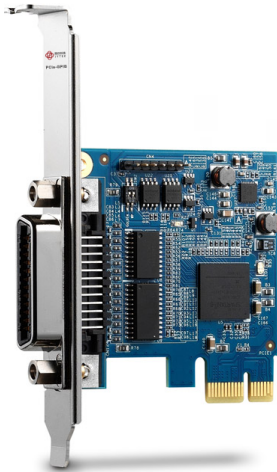

USB-GPIB

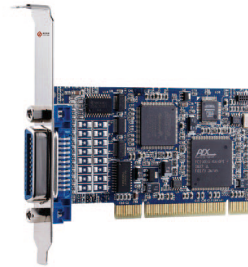

PCI-GPIB

### 简介

The IEEE-488 standard, also known as GPIB, is a bus interface that connects instruments with a computer to form an ATE system.

Today, GPIB is still the most popular interface between computer and instruments. JYTEK's USB-GPIB, PCI-GPIB and PCIe-GPIB controller interface cards are fully compatible with the IEEE-488.2 instrumentation control and communication standard and are capable of controlling up to 14 stand-alone instruments via IEEE-488 cables. The USB-GPIB, PCI-GPIB and PCIe-GPIB are designed to meet the requirements of high performance and maximum programming portability.

With APIs that are compatible with NI-488.2\* driver software and VISA support, the USB-GPIB, PCI-GPIB and PCIe-GPIB offer the best compatibility with your existing applications and instrument drivers. JYTEK has also implemented GPIB interface on our PXI/PXIe controller product line.

JYTEK's PCI-GPIB with low-profile PCI form factor, supports both 3.3 V and 5 V PCI buses and can be adapted to most industrial and desktop computers. A built-in FIFO between the GPIB bus and PCI controller buffers GPIB read/write operations. The maximum GPIB transfer rates of PCI-GPIB and USB-GPIB up to 1.5 MB/s.

\*Devices can be connected in linear or star configuration, or a combination of the two topologies.

### Features

- Fully compatible with the IEEE-488 standard
- Support 32-bit 3.3 V or 5 V PCI bus (PCI-GPIB)
- Up to 1.5 MB/s data transfer rates (USB-GPIB and PCI-GPIB)
- Built-in FIFO for read/write operations
- Provide APIs compatible with NI-488.2 driver software\*
- Support industrial-standard VISA library
- Interactive utility for testing and diagnostics

#### USB-GPIB

- USB 2.0 compatible
- 2 M USB cable attached for instrument connection
- No external power required
- Easy GPIB connectively for laptops

#### Supported Operating System

- Windows XP, Windows 7/8 x64/x86

### Driver and SDK

- Visual Studio.NET/BCB
- MATLAB®

### Ordering Information

- **USB-GPIB**  
High-Performance IEEE-488 GPIB interface for USB
- **PCI-GPIB**  
High-Performance IEEE-488 GPIB interface card for low-profile PCI bus
- **PCIe-GPIB**  
High-Performance IEEE-488 GPIB interface card for low-profile PCI Express bus
- **ACL-IEEE488-1**  
IEEE-488 standard cable, 1 meter length
- **ACL-IEEE488-2**  
IEEE-488 standard cable, 2 meter length
- **ACL-IEEE488-4**  
IEEE-488 standard cable, 4 meter length

## Specifications

	PCI-GPIB	USB-GPIB
GPIB Bus Specifications	Up to 14 instruments connected	
	Maximum 1.5 MB/s data transfer rate (USB-GPIB and PCI-GPIB)	
	Maximum 1.2 MB/s data transfer rate (PCIe-GPIB)	
	Cable length -2 meters between each instrument (suggested) -20 meters total cable length	
	Data transfer mode: 8 bits parallel	
	Handshake: 3 wire handshake, reception of each data byte is acknowledged	
Certifications	EMC/EMI: CE, FCC Class A	
Software Compatibility	Visual Studio.NET/BCB/C#	
	MATLAB®*	
External Indicators (USB-GPIB)	Ready : Green for active device	
	Active : Blinking amber for data transferring	
General Specifications	Operating temperature : 0°C to 55°C (32°F to 131°F)	
	Storage temperature : -20°C to +80°C (-4°F to 176°F)	
	Relative humidity : 5% to 95%, non-condensing	
	Power requirements	
	+5 V	+5 V
	250 mA (typical)	190 mA (typical)
	300 mA (maximum)	500 mA (maximum)
Dimensions (not including connectors)	PCI-GPIB: 120 mm x 64 mm (4.68" x 2.49")	
	USB-GPIB: 81.7 mm (L) x 66.1 mm (W) x 27.8 mm (H) (3.2" x 2.57" x 1.1")	
I/O Connectors	GPIB: IEEE-488 standard 24 pin	
	USB: USB standard series A plug (USB-GPIB)	

